



Tel: 01943 602001 Fax: 01943 816796
 Email: sales@SenecaUK.com
 Web: www.SenecaUK.com

Z-LINE
 Z109REG-ER

Universal Converter with galvanic isolation

Z-LINE

Standard converters




- ▶ INPUT: Voltage, Current, TC (J,K,R,S,T,B,E,N), PT100, Potentiometer
- ▶ OUTPUT: current 0..20, 4 . 20 mA
voltage 0..5, 1..5, 0..10, 2..10 Vdc (scale inversion also)
- ▶ DIP-SWITCHES for selecting: input type, zero and span, output mode (zero elevation, scale inversion), output span
- ▶ Galvanic isolation @ 3-way
- ▶ Screw-fit terminals removable
- ▶ Din rail mounting
- ▶ Power supply: 19..40 Vdc, 19..28 Vac



TECHNICAL DATA

Z109REG – Universal Converter

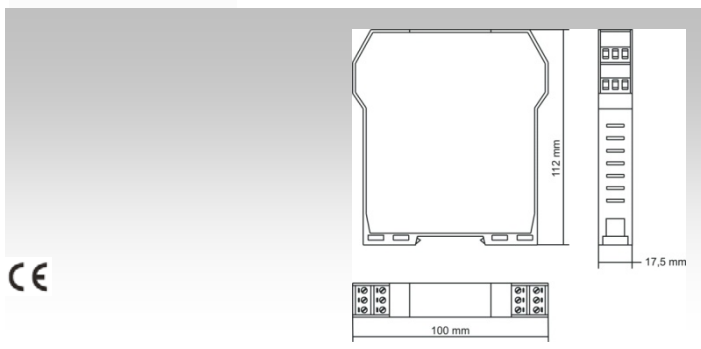

ORDER CODE

Cod. Z109REG
Cod. Z109REG-ER With square root extraction

- Accessories
- SENECA-TOOL** Configuration Kit (software + cable)
 - Z-SETUP** Configuration software (downloading from www.seneca.it)
 - PM001600** Configuration cable

GENERAL FEATURES

Power supply	19÷40Vdc, 19÷28 Vac
Channels	N.1
Status indicators	- Power - Setting error - Off scale
Galvanic Isolation	Power supply // input // output at 1500 Vac, digital
Hot swapping	Yes
Power consumption	2,5 W
Sampling frequency	3 samples / second
Protections	Surges: 400W/ms. Loop supply short-circuit protected
Protection for inputs	Except current: 60V continuous; current 200mA continuous.
Humidity	30..90% a +40°C (not condensing)

Design	Terminal housing for mounting on 35 mm DIN 46277
Data memory	EEPROM for all configuration data; storage time: 10 years.
DIP Switch	- Inputs signal setup - Output signal setup
Enclosure	"V0" self-extinguishing glass filled nylon case
Dimensions	17,5 x 100 x 112 mm (w x h x d)
Weight	140 g
Operating temperature	0..50 °C
Connections	Plug-in screw clamp terminal blocks, wires up to 2.5 mm ²
Standards	EN50081-2 EN50082-2 EN61010-1
Approvals	CE

INPUT

Current: bipolar up to 20mA_{cc}, input impedance 2.5 ohm, resolution 2uA
Voltage: bipolar up to 10V_{cc} in 4 scales: 200mV, 2V, 5V, 10V, input impedance 1 Mohm, resolution 0.01%
PT100: 3-wire measurement, range -200..+600 °C, energising current 0.56mA, resolution 0.035 ohm, automatic detection of cable interruption or RTD
Thermocouple: type J,K,R,S,T,B,E,N; resolution 5uV, automatic detection of TC interruption.
Potentiometer: full scale min 500 ohm, max 15 Kohm, resolution 0.01%.

OUTPUT

Current: 0..20 mA, 4..20 mA, 20..0 mA e 20..4 mA
 Higher load resistance: 600 Ohm
Voltage: 0..5 Vdc, 1..5 Vdc, 0..10 Vdc and 10..0 Vdc
 Lower load resistance: 2,5 KOhm

DIMENSIONS AND INSTALLATION

Power supply **Input**

	Current – passive input 	Current – active input 	Voltage 	Thermocouple 	RTD 	Potentiometer
--	------------------------------------	-----------------------------------	--------------------	-------------------------	----------------	--------------------------

Setting **Output**

Dip switches configuration (input signal)

SW1	INPUT TYPE	ZERO	SPAN
0 0 0	V	1	4 5 5 1
0 0 0	mV	2	0 0 2 2
0 0 0	mA	3	0 0 3 3
0 0 0	PT100	4	0 0 4 4
0 0 0	Tc J	5	0 0 5 5
0 0 0	Tc K	6	0 0 6 6
0 0 0	Tc R	7	0 0 7 7
0 0 0	Tc S	8	0 0 8 8
0 0 0	Tc T		
0 0 0	Tc B		
0 0 0	Tc E		
0 0 0	Tc N		

Current – active output 	Current – passive output 	Voltage
------------------------------------	-------------------------------------	--------------------