


Amplifier with two independent channels for ON-OFF sensors Z112D

GENERAL FEATURES

- 2 pulse inputs for all the most common sensors: mechanical contact, reed, 2 and 3 wire npn with 12 Vdc and 24 Vdc power supply, 3 wire pnp with 24 Vdc power supply, NAMUR, photoelectric.
- Maximum frequency 400 Hz.
- Reed-relay output with 1 SPST contact, maximum capacity 10 VA ($V_{max} = 100\text{ V}$, $I_{max} = 0.5\text{ A}$) (on resistive load).
- Leds on front panel indicating power on and relays energised.
- Insulation between power supply and inputs: 1500 Vac.

TECHNICAL SPECIFICATIONS

Power supply:	19-40 Vdc, 19-28 Vac 50-60Hz, max 2.5W.
Inputs:	Pulses: mechanical contact, reed, 2 and 3 wire npn with 12 Vdc and 24 Vdc power supply, 3 wire pnp with 24 Vdc power supply, NAMUR, photoelectric. Maximum frequency 400 Hz
Outputs:	Reed-relay with 1 SPDT changeover, maximum capacity 10 VA ($V_{max} = 100\text{ V}$, $I_{max} = 0.5\text{ A}$) (on resistive load).
Ambient conditions:	Temperature: 0..50°C, min humidity 30%, max 90% at 40°C non-condensing (see also section Rules for installation).
Standards: 	The instrument complies with the following standards: EN50081-2 (electromagnetic emission, industrial environment) EN50082-2 (electromagnetic immunity, industrial environment) EN61010-1 (safety)

INSTALLATION INSTRUCTIONS

Module Z112D was designed for fitting to guide DIN 46277, in a vertical position.
For optimum operation and long life, make sure adequate ventilation is provided for the module/s, avoiding placing raceways or other objects which could obstruct the ventilation grilles.
Do not install the modules above appliances generating heat – we advise you to install in the lower part of the panel.

SEVERE OPERATING CONDITIONS:

Severe operating conditions are as follows:

- *High power supply voltage ($> 30V_{cc} / > 26\text{ Vac}$)*
- *Power supply of the sensor at input.*
- *Use of the output on generated current*

When modules are installed side by side, it may **be necessary to separate them by at least 5 mm** in the following cases:

- If panel temperature exceed 45°C and at least one of the severe operating conditions exists.
- If panel temperature exceed 35°C and at least two of the severe operating conditions exist.




SENECAUK

Web: www.SenecaUK.com Mail: Sales@SenecaUK.com

Tel: 01943 602001 Fax 01943 816796


We advise you to use shielded cables for connecting signals. The shield must be connected to an earth wire used specifically for instrumentation. Moreover, it is good practice to avoid routing conductors near power appliances such as inverters, motors, induction ovens, etc.

POWER SUPPLY



Power supply voltage must be in the range 19 to 40 Vdc (at any polarity), 19 to 28 Vac; also see section; **INSTALLATION INSTRUCTIONS**.
The upper limits must not be exceeded, to avoid serious damage to the module.
 Protect the power supply source against possible damage of the module by using a fuse of suitable size.

INPUT CONNECTIONS AND DIP SWITCH SETTING (Maximum frequency 400 Hz)

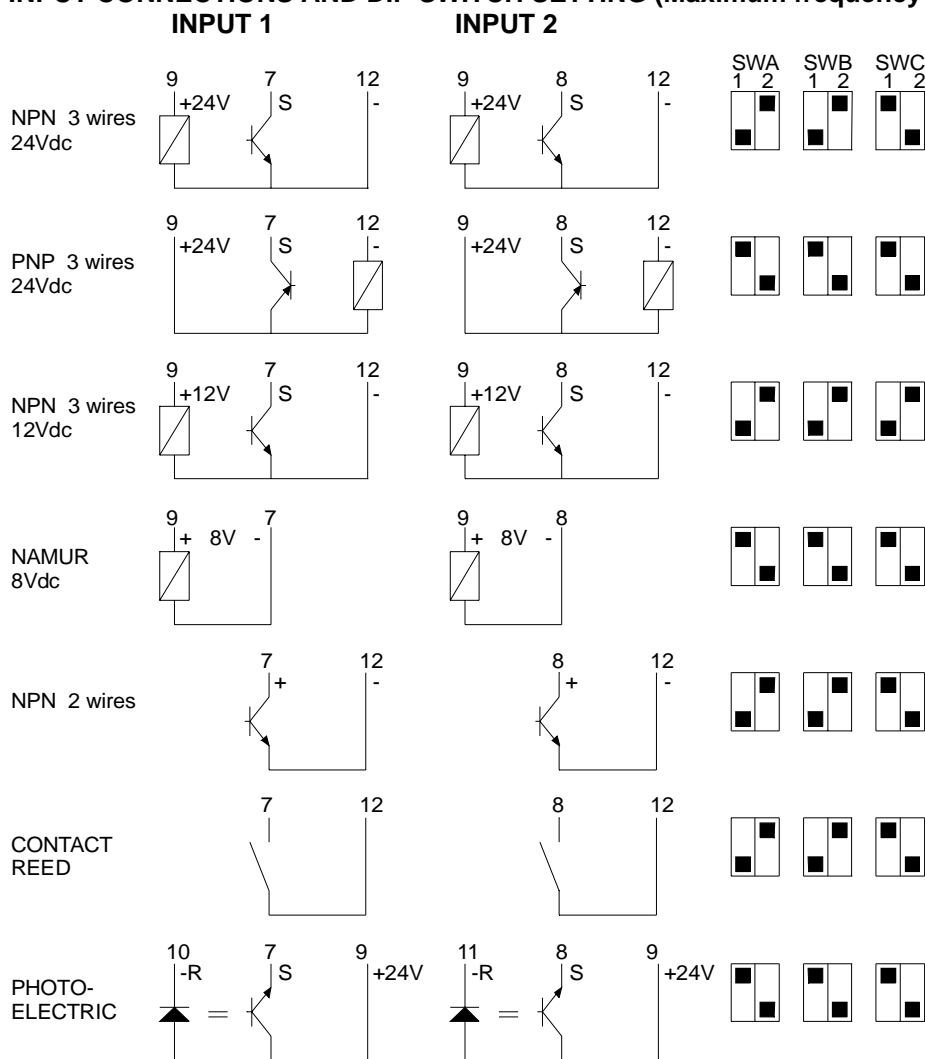



SENECAUK

Web: www.SenecaUK.com Mail: Sales@SenecaUK.com

Tel: 01943 602001 Fax 01943 816796

OUTPUTS

Reed-relay with 1 SPST contact (for capacity on resistive load, see graph).

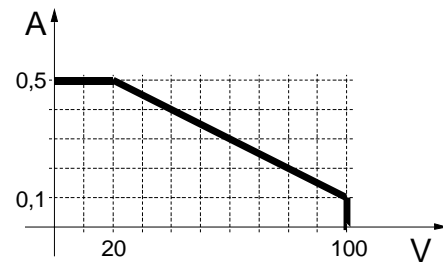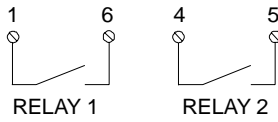

UNI EN ISO 9001



SENECAUK



CERTIFICATE
Nr. 9115 SENE

This document is property of SENECAUK. Duplication and reproduction are forbidden, if not authorized. Contents of the present documentation refers to products and technologies described in it. All technical data contained in the document may be modified without prior notice Content of this documentation is subject to periodical revision.

www.SenecaUK.com Sales@senecaUK.com

Tel: 01943 602001 Fax: 01943 816796

SENECAUK

Unit 1 Golden Butts Road

LS29 8HS ilkley

West Yorkshire

United Kingdom



SENECAUK

Web: www.SenecaUK.com Mail: Sales@SenecaUK.com

Tel: 01943 602001 Fax 01943 816796